

BRIAN JAMES TRAILERS

» Connected to you



CAR TRANSPORTER TRAILER
PRICE LIST
JANUARY 2021

UNITED KINGDOM

CONTENTS

- 04 CAR HAULER
- 06 C TRANSPORTER
- 08 A TRANSPORTER
- 10 T TRANSPORTER
- 12 RACE SHUTTLE 2 and 3
- 14 RACE SPORT
- 16 UNIVERSAL OPTIONS



All Brian James Trailers are fully approved to EEC Dir 2007/46.


BRIAN JAMES TRAILERS in association with

ALKO
QUALITY FOR LIFE



CAR HAULER

CAR HAULER STANDARD EQUIPMENT



PRODUCT CODE	145-1210	145-3210
CAPACITY		
Gross kg	2,700	2,700
Load kg	2,169	2,131
Unladen trailer weight kg	531	569
DIMENSIONS		
Load bed length m A	4.00	4.90
Load bed width m B	2.00	2.00
Overall trailer length m C	5.58	6.48
Overall trailer width m D	2.44	2.44
Bed load height m (unladen with standard 12" wheels fitted) E	0.43	0.43
Towball height (loaded with standard 12" wheels fitted, centre of towball) m	0.47	0.47
RUNNING GEAR		
Axles	2	2
Wheel / tyre size	12" (155/70)	12" (155/70)
Jockey wheel, serrated type, side clamped, central position	●	●
Steel spare wheel/tyre and carrier, chassis mounted	●	●
REAR LOADING		
Low profile 1.7m loading ramps feature useful lifting handles for easy handling	●	●
EXTERIOR		
Coloured body trim - Jet black	●	●
SECURITY		
Cast steel coupling head + integral high security lock	●	●
TRAILER LIGHTING		
12V LED trailer lighting - front marker lamps, stop, tail, indicators and registration plate (fog and reverse lamps are roundpoint style 12V filament bulb)	●	●
WARRANTY		
5 year extended chassis warranty	●	●
DELIVERY		
Delivery to a UK dealer	●	●
PRICE		
£ ex vat	2,289	2,449

CAR HAULER


OPTIONAL EQUIPMENT

	£ ex vat
WHEELS	
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts	350
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts	620
WINCHES	
Manually operated winch with steel cable, auto-brake mechanism and roller guide	290
OPERATION	
Hydraulic tilt-bed operation for lowest loading angle	530
LOADING OPTIONS	
Lightweight assistor ramps – ultra low loading facility (pair)	110
Rear support stands, side clamped drop down type (for use with non-tilting beds only)	80
STORAGE	
Tyre storage and transport rack - high level rack with securing system and locking cable	450
LOAD RESTRAINT	
Wheel chocks (pair) bolted adjustable positions - lower profile designed for sports cars	80

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

C TRANSPORTER


STANDARD EQUIPMENT

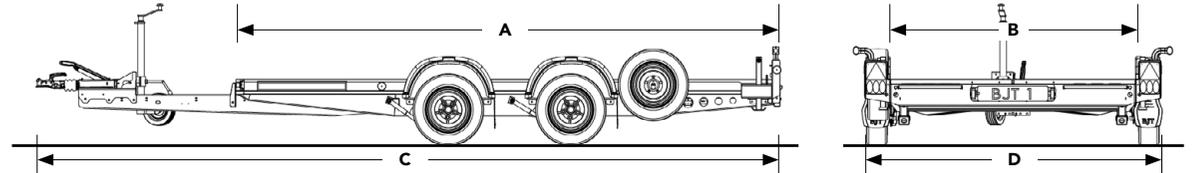

PRODUCT CODE	126-1011	126-1111	126-1211	126-1221	126-2002	126-2012	126-2112	126-2213	126-2223	126-2323	126-2423
CAPACITY											
Gross kg	1,500	1,500	1,500	1,500	2,000	2,000	2,000	2,600	2,600	2,600	2,600
Load kg	1,060	1,010	973	968	1,445	1,425	1,388	1,970	1,955	1,930	1,905
Unladen trailer weight kg	440	490	527	532	555	575	612	630	645	670	695
DIMENSIONS											
Load bed length m A	2.70	3.20	3.70	3.70	3.30	3.30	3.70	4.00	4.00	4.50	5.00
Load bed width m B	1.80	1.80	1.80	2.00	1.70	1.80	1.80	1.80	2.00	2.00	2.00
Overall trailer length m C	4.18	4.68	5.18	5.18	4.72	4.72	5.18	5.48	5.48	5.98	6.48
Overall trailer width m D	2.18	2.18	2.18	2.38	2.08	2.18	2.18	2.18	2.38	2.38	2.38
Bed load height m	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42
Towball height (loaded, centre of towball) m	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
RUNNING GEAR											
Wheel / tyre size	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)
Axles	1	1	1	1	2	2	2	2	2	2	2
Spare wheel	●	●	●	●	●	●	●	●	●	●	●
Jockey wheel, side clamped, central position	●	●	●	●	—	—	—	—	—	—	—
Jockey wheel, standard duty serrated, side clamped, central position	—	—	—	—	●	●	●	●	●	●	●
RAMPS											
High grip punched ramps 1.90m E	●	●	●	●	—	—	—	—	—	—	—
High grip punched ramps 2.40m E	—	—	—	—	●	●	●	●	●	●	●
EXTERIOR											
Coloured body trim – Sargasso blue	●	●	●	●	●	●	●	●	●	●	●
Flush fitting centre deck, featuring durable and strong anti-slip deck phenol ply	●	●	●	●	●	●	●	●	●	●	●
SECURITY											
Cast steel coupling head + integral high security lock	●	●	●	●	●	●	●	●	●	●	●
WARRANTY											
5 year extended chassis warranty	●	●	●	●	●	●	●	●	●	●	●
DELIVERY											
Delivery to a UK dealer	●	●	●	●	●	●	●	●	●	●	●
PRICE											
£ ex vat	1,879	1,999	2,119	2,119	2,609	2,609	2,719	2,829	2,829	2,939	3,109

C TRANSPORTER


OPTIONAL EQUIPMENT

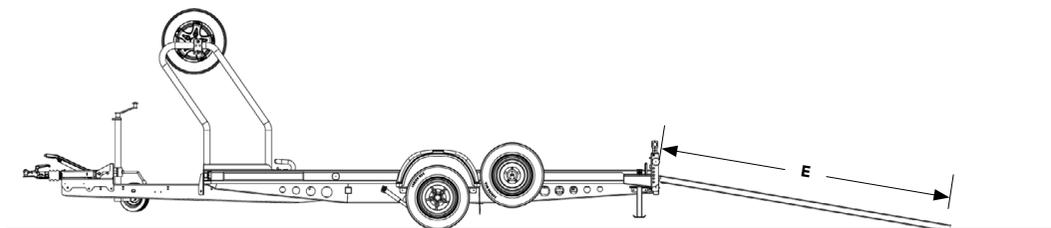

WHEELS	£ ex vat
Alloy wheels – 3x (12" Style B2 - Silver) + safety locking wheel bolts (for single axle models)	220
Alloy wheels – 3x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for single axle models)	370
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts (for twin axle models)	350
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models)	620
WINCHES	
Manually operated winch 2 speed + 3 point adjustable pull position	260
Manually operated winch with steel cable, auto-brake mechanism and multi-point pulley guide	330
12V 4,500lb electric operation winch with steel wire cable, roller fairlead and remote control (note: cannot be fitted in conjunction with storage box) available on twin axle models only	520
Portable power pack for 4,500lb electric winch, with charger and Anderson twin pin plug connector	260
LOADING OPTIONS	
Rear support stands	130
DECKING	
Deck slick pads x4, red - protect soft compound racing tyres from the punched deck	100
STORAGE	
Fuel can storage box, lockable, twin opening doors for 1, 2 or 3 x 20 litre jerry cans – available in Sargasso blue	190
High level tyre storage and transport rack with securing system and locking cable	450
LOAD RESTRAINT	
Wheel chock, bolted to bed, optional positions - lower profile designed for sports cars	90
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	110

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.


A TRANSPORTER STANDARD EQUIPMENT

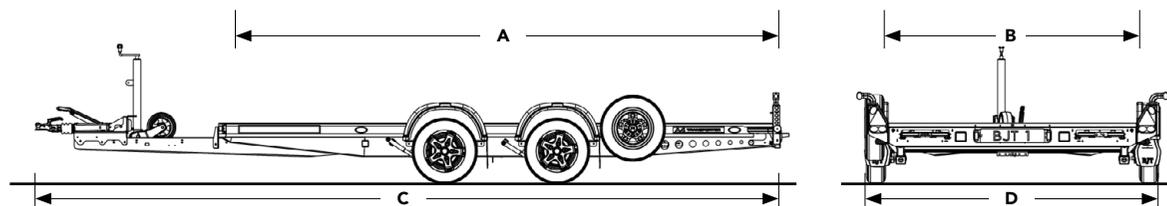

PRODUCT CODE	125-1011	125-1111	125-1211	125-1312	125-2002	125-2112	125-2213	125-2223	125-2323	125-2324	125-2423	125-2424
CAPACITY												
Gross kg	1,500	1,500	1,500	1,500	2,000	2,000	2,600	2,600	2,600	3,000	2,600	3,000
Load kg	1,060	1,010	973	955	1,445	1,388	1,970	1,955	1,930	2,320	1,905	2,295
Unladen trailer weight kg	440	490	527	545	555	612	630	645	670	680	695	705
DIMENSIONS												
Load bed length m A	2.70	3.20	3.70	4.00	3.30	3.70	4.00	4.00	4.50	4.50	5.00	5.00
Load bed width m B	1.80	1.80	1.80	2.00	1.70	1.80	1.80	2.00	2.00	2.00	2.00	2.00
Overall trailer length m C	4.24	4.74	5.24	5.53	4.77	5.24	5.54	5.54	6.04	6.04	6.54	6.54
Overall trailer width m D	2.18	2.18	2.18	2.38	2.08	2.18	2.18	2.38	2.38	2.38	2.38	2.38
Bed load height m	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42	0.42
Towball height (loaded, centre of towball) m	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40	0.40
RUNNING GEAR												
Wheel / tyre size	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)
Axles	1	1	1	1	2	2	2	2	2	2	2	2
Spare wheel	●	●	●	●	●	●	●	●	●	●	●	●
Jockey wheel, heavy duty serrated type, side clamped, central position	●	●	●	●	—	—	—	—	—	—	—	—
Jockey wheel, heavy duty auto-retractable	—	—	—	—	●	●	●	●	●	●	●	●
REAR LOADING												
High grip punched, glide out ramps 1.90m E	●	●	●	●	—	—	—	—	—	—	—	—
High grip punched, glide out ramps 2.40m E	—	—	—	—	●	●	●	●	●	●	●	●
Rear stands with foot pedal action, gas spring operation	●	●	●	●	●	●	●	●	●	●	●	●
STORAGE												
Bed locker, front, automatic lift	●	●	●	●	●	●	●	●	●	●	●	●
EXTERIOR												
Body trim – available in Sargasso blue, Poppy red, Arcelor anthracite or Jet black	●	●	●	●	●	●	●	●	●	●	●	●
Flush fitting centre deck, featuring durable and strong anti-slip deck phenol ply	●	●	●	●	●	●	●	●	●	●	●	●
SECURITY												
Cast steel coupling head + integral high security lock	●	●	●	●	●	●	●	●	●	●	●	●
WARRANTY												
5 year extended chassis warranty	●	●	●	●	●	●	●	●	●	●	●	●
DELIVERY												
Delivery to a UK dealer	●	●	●	●	●	●	●	●	●	●	●	●
PRICE												
£ ex vat	2,319	2,479	2,649	2,689	3,149	3,289	3,419	3,419	3,549	3,709	3,629	3,819

A TRANSPORTER


OPTIONAL EQUIPMENT

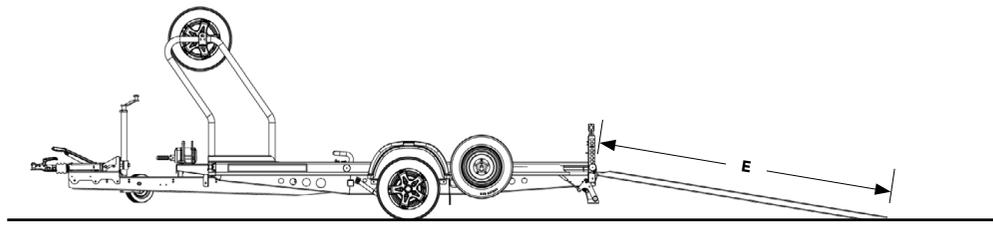

WHEELS	£ ex vat
Alloy wheels – 3x (12" Style B2 - Silver) + safety locking wheel bolts (for single axle models)	220
Alloy wheels – 3x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for single axle models)	370
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts (for twin axle models)	350
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models)	620
WINCHES	
Manually operated winch 2 speed + 3 point adjustable pull position	260
Manually operated winch with steel cable, auto-brake mechanism and multi-point pulley guide	330
12V 4,500lb electric operation winch with steel wire cable, roller fairlead and remote control (note: cannot be fitted in conjunction with storage box) available on twin axle models only	520
Portable power pack for 4,500lb electric winch, with charger and Anderson twin pin plug connector	260
DECKING	
Deck slick pads x4, red - protect soft compound racing tyres from the punched deck	100
STORAGE	
Fuel can storage box, lockable, twin opening doors for 1, 2 or 3 x 20 litre jerry cans – available in Sargasso blue, Poppy red, Arcelor anthracite or Jet black	190
High level tyre storage and transport rack with securing system and locking cable	450
LOAD RESTRAINT	
Wheel chock, bolted to bed, optional positions - lower profile designed for sports cars	90
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	110

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

T TRANSPORTER STANDARD EQUIPMENT



PRODUCT CODE	230-5442	230-5443	230-6443	230-5452	230-5453	230-5463	230-6452	230-6453	230-6462	230-6463	230-6552	230-6553	230-6562	230-6563
CAPACITY														
Gross kg	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500	3,500
Load kg	2,670	2,665	2,615	2,668	2,663	2,650	2,618	2,612	2,605	2,601	2,618	2,612	2,605	2,601
Unladen trailer weight kg	830	835	885	832	837	850	882	888	895	899	882	888	895	899
DIMENSIONS														
Load bed length m A	5.00	5.00	5.50	5.00	5.00	5.00	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
Load bed width m B	2.07	2.22	2.22	2.07	2.22	2.22	2.07	2.22	2.07	2.22	2.07	2.22	2.07	2.22
Overall trailer length m C	6.56	6.56	7.07	6.56	6.56	6.56	7.07	7.07	7.07	7.07	7.07	7.07	7.07	7.07
Overall trailer width m D	2.13	2.28	2.28	2.13	2.28	2.28	2.13	2.28	2.13	2.28	2.13	2.28	2.13	2.28
Bed load height m E	0.64	0.64	0.64	0.61	0.61	0.64	0.61	0.61	0.64	0.64	0.61	0.61	0.64	0.64
Tow-ball height (loaded) m F	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39	0.39
RUNNING GEAR														
Axles	2	2	2	3	3	3	3	3	3	3	3	3	3	3
Wheel / tyre size	12" (195/60)	12" (195/60)	12" (195/60)	10" (195/55)	10" (195/55)	12" (195/60)	10" (195/55)	10" (195/55)	12" (195/60)	12" (195/60)	10" (195/55)	10" (195/55)	12" (195/60)	12" (195/60)
Spare wheel	●	●	●	●	●	●	●	●	●	●	●	●	●	●
EXTERIOR														
Body trim - Sargasso blue, Poppy red, Arcelor anthracite or Jet black	●	●	●	●	●	●	●	●	●	●	●	●	●	●
LOADING														
Tilt-bed - hydraulic operation	○	○	○	○	○	○	○	○	○	○	●	●	●	●
Tail panel, full width	—	—	—	—	—	—	—	—	—	—	●	●	●	●
1.8m rear ramps - (not available on tail panel equipped T6 trailers)	●	●	●	●	●	●	●	●	●	●	—	—	—	—
SECURITY														
Cast steel coupling head + integral high security lock	●	●	●	●	●	●	●	●	●	●	●	●	●	●
WARRANTY														
5 year extended chassis warranty	●	●	●	●	●	●	●	●	●	●	●	●	●	●
DELIVERY														
Delivery to a UK dealer	●	●	●	●	●	●	●	●	●	●	●	●	●	●
PRICE														
£ ex vat	3,959	4,249	4,629	4,549	4,839	4,899	4,919	5,209	4,959	5,259	5,389	5,689	5,429	5,739

T TRANSPORTER


OPTIONAL EQUIPMENT

WHEELS	£ ex vat
Alloy wheels – 5x (12" Style B2 - Silver, 5.5J) + safety locking wheel bolts (for twin axle models)	680
Alloy wheels – 5x (12" Style B2, 5.5J- Anthracite, diamond cut) + safety locking wheel bolts (for twin axle models)	960
Alloy wheels – 7x (10" Style B2 - Silver) + safety locking wheel bolts (for tri-axle models)	480
Alloy wheels – 7x (10" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts (for tri-axle models)	870
Alloy wheels – 7x (12" Style B2 - Silver, 5.5J) + safety locking wheel bolts (for tri-axle models)	960
Alloy wheels – 7x (12" Style B2, 5.5J- Anthracite, diamond cut) + safety locking wheel bolts (for tri-axle models)	1,360
WINCHES	
Manual winch kit, auto-braked + free spool - Includes central pulley system - not compatible with cross over loading ramps	320
Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack)	520
HD electric winch kit, 8000lb drag capacity, 12V, wander lead remote control, no power system (see below for details of power pack) (not compatible with headboard or front cross-loading ramps)	720
Power pack, portable HD 12V for electric winch - supplied with quick coupling Anderson connectors	260
OPERATION	
Hydraulic tilt-bed operation (standard on tri-axle trailers with tail panel)	530
LOADING OPTIONS	
High grip punched ramps - rear, 2.3m (not available on tail panel equipped tri-axle trailers) (upgrade from standard loading ramps)	60
High grip punched cross over loading ramps - front, 1.8m (not available on tail panel equipped tri-axle trailers)	300
Lightweight assistor ramps (pair) – ultra low loading facility (not compatible with front loading ramps due to the shared storage location unless supplied loose and stored in the towing vehicle)	290
Swivel jockey mounting kit, required for cross over loading operation	190
Rear support stands with kick down operation	120
DECKING	
Deck slick pads x4, red - protect soft compound racing tyres from the punched deck	100
LIGHTING	
LED lighting kit, check compatibility of towing vehicle electrics with trailer LED lamps (indicators)	230
SIDE OPTIONS	
Headboard, removable - brush sealed bottom edge for winch operation	240
STORAGE	
Storage box, central bed location, fitted	210
High level tyre storage and transport rack with securing system and locking cable	450
LOAD RESTRAINT	
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	110

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

RACE SHUTTLE

RACE SHUTTLE 2 and 3 STANDARD EQUIPMENT.

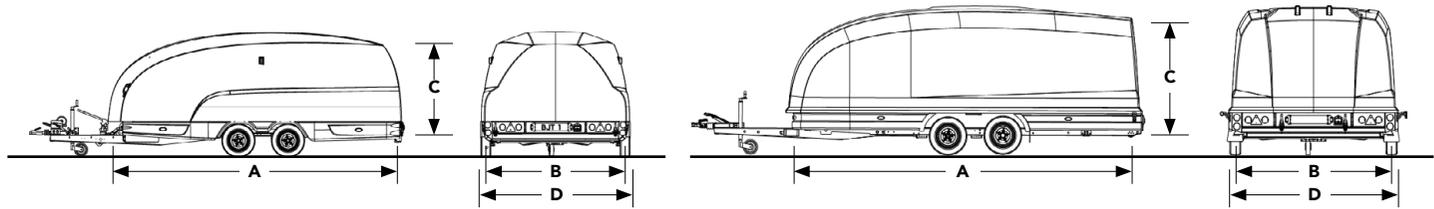

MODEL	RACE SHUTTLE 2		RACE SHUTTLE 3		
	300-1010	300-1011	330-1010	330-1011	330-1021
PRODUCT CODE					
CAPACITY					
Gross kg	2,600	2,600	2,600	2,600	3,000
Load kg	1,809	1,789	1,669	1,649	2,049
Unladen trailer weight kg	791	811	931	951	951
DIMENSIONS					
Load bed length m A	4.30	4.30	4.70	4.70	4.70
Load bed width m B	1.95	1.95	1.95	1.95	1.95
Overall trailer length m	5.82	5.82	6.20	6.20	6.20
Internal height m C	1.53	1.53	1.60	1.60	1.60
Overall trailer width m D	2.30	2.30	2.30	2.30	2.30
Towball height (loaded, centre of towball) m	0.40	0.40	0.40	0.40	0.40
OPERATION					
Fixed bed	●	—	●	—	—
Hydraulic tiltbed	—	●	—	●	●
Spare wheel	●	●	●	●	●
REAR LOADING					
Loading ramps 2.40m	●	●	●	●	●
SECURITY					
Cast steel coupling head + integral high security lock	●	●	●	●	●
STORAGE					
Storage pockets in sides	—	—	●	●	●
EXTERIOR					
Dark grey lower bodywork	●	●	●	●	●
White high gloss GRP upper body	●	●	●	●	●
INTERIOR					
LED illumination. Background lighting.	●	●	●	●	●
WARRANTY					
5 year extended chassis warranty	●	●	●	●	●
DELIVERY					
Delivery to a UK dealer	●	●	●	●	●
PRICE					
£ ex vat	7,279	7,809	8,389	8,939	9,219


RACE SHUTTLE 2 and 3

OPTIONAL EQUIPMENT

WHEELS	£ ex vat
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts	350
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts	620
WINCHES	
Manual winch 2 speed, steel cable and roller guide	290
Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control (no power system)	520
Electric winch kit, 4500 lb drag capacity, 12V, wander lead remote control (includes portable power pack)	780
STORAGE	
Tyre rack + fuel storage station (check suitability for saloon car transportation as clearance under rack is reduced)	560
LOAD RESTRAINT	
Adjustable wheel stop bar – quick release	140

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

RACE SPORT STANDARD EQUIPMENT

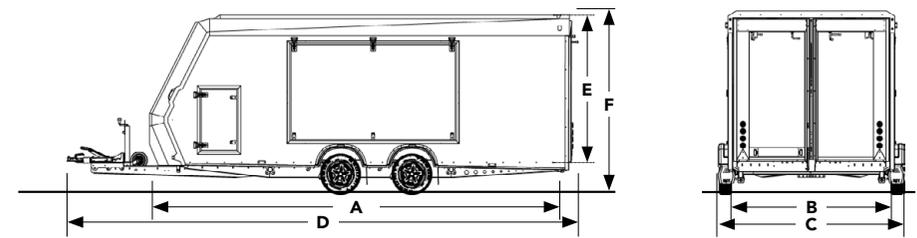

PRODUCT CODE	340-4500	340-4510	340-5000	340-5010	340-5510
CAPACITY					
Gross kg	2,600	3,000	2,600	3,000	3,000
Load kg	1,550	1,930	1,480	1,860	1,810
Unladen trailer weight kg	1,050	1,070	1,120	1,140	1,190
DIMENSIONS					
Load bed length m A	4.50	4.50	5.00	5.00	5.50
Load bed width m B	2.00	2.00	2.00	2.00	2.10
Overall trailer width m C	2.38	2.38	2.38	2.38	2.48
Overall length m D	6.06	6.06	6.56	6.56	7.06
Internal height (min aperture) m	1.77	1.77	1.77	1.77	1.77
Internal height (to roof) m E	1.82	1.82	1.82	1.82	1.82
Overall trailer height m F	2.25	2.25	2.25	2.25	2.25
Tow-ball height (loaded) m	0.40	0.40	0.40	0.40	0.40
RUNNING GEAR					
Axles	2	2	2	2	2
Wheel / tyre size	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)	12" (155/70)
Spare wheel	●	●	●	●	●
STANDARD FEATURES					
Rear support legs	●	●	●	●	●
Front access hatch, left and right (Dimensions 4.5m and 5.0m = 0.85m (H) x 0.5m (W), 5.5m = 1.25m (H) x 0.5m (W))	●	●	●	●	●
'Gullwing' side doors, left and right	●	●	●	●	●
Twin rear door/ramps with fold-out assistor ramps	●	●	●	●	●
Centre storage tray	—	—	—	—	●
Daylight roof, full length	●	●	●	●	●
Punched hi-grip deck left and right	●	●	●	●	●
Front work shelf	●	●	●	●	●
Jockey wheel, auto retractable – standard HD	●	●	●	●	●
SECURITY					
Cast steel coupling head + integral high security lock	●	●	●	●	●
WARRANTY					
5 year extended chassis warranty	●	●	●	●	●
DELIVERY					
Delivery to a UK dealer	●	●	●	●	●
PRICE					
£ ex vat	8,469	8,949	8,619	9,089	9,989

RACE SPORT

OPTIONAL EQUIPMENT

	£ ex vat
WHEELS	
Alloy wheels – 5x (12" Style B2 - Silver) + safety locking wheel bolts	350
Alloy wheels – 5x (12" Style B2 - Anthracite, diamond cut) + safety locking wheel bolts	620
WINCHES	
Electric winch, 12V operation with steel wire cable, roller fairlead and cable connected remote control - on-board battery	400
DECKING	
Deck slick pads x4, red - protect soft compound racing tyres from the punched deck	100
LIGHTING	
LED Lighting kit - rear lights, check compatibility of towing vehicle electrics with trailer LED lamps (indicators)	230
STORAGE	
Tyre storage and transport rack - high level rack with securing system	330
Front storage - for 20 litre jerry can x 2 + shelves	130
Aluminium side storage racks	230
Aluminium lid kit for centre tray (available on 340-5510 model only)	210
INTERIOR	
Interior light pack, x4 LED Mini strips, centrally mounted overhead	270
LOAD RESTRAINT	
Wheel chocks, pair (red), quick release and fully adjustable, professional system engages into trailer chassis	110
Wheel chock loading assist, full width wheel chock	80

See page 16 for details of additional security, safety and load restraint options which are available on all of our ranges.

UNIVERSAL OPTIONS

LOAD RESTRAINT	£ ex vat
Tie-down straps - blue, set of 4 x wheel 'sling' straps, 2500 DaN/Kg	130
Tie-down straps - orange, set of 4 x wheel 'sling' straps, 4000 DaN/Kg	150
Tie-down straps - red, set of 4 x wheel circumference straps, 3000 DaN/Kg (not suitable for Race Shuttle models)	170
SAFETY	
Wheel safety kit - includes torque wrench, 19mm socket and digital tyre pressure gauge	80
Tyre pressure monitoring system – TPMS by TyrePal in-car monitoring with external sensors (*pricing shown for 1 axle/2 axle/3 axle)	150/210/270*
SECURITY	
Datatag kit, provides an asset database registered transponder	110
Lockfast Bar Kit, 2 point fixing (not suitable for alloy wheels)	210
Lockfast Bar Kit, 3 point fixing (not suitable for alloy wheels)	250





“THE ONLY DIFFERENCE BETWEEN
ORDINARY AND EXTRAORDINARY IS
THAT LITTLE EXTRA”
JIMMY JOHNSON

BRIAN JAMES TRAILERS

» Connected to you



NOTES

All images used are for illustrative purposes only and may show non-standard equipment and finishes.
All products are subject to change without prior notice due to our continuous development programme.

© BRIAN JAMES TRAILERS LIMITED

Edition 2021Q1-CTUK-PL02

Brian James Trailers Limited.
Sopwith Way, Drayton Fields Industrial Estate
Daventry, Northampton, NN11 8PB

T + 44 (0)1327 308 833

For more information please call or visit our website

www.brianjamestrailers.co.uk